
- Subject to changes without notice -

Speed oil streak : approx. 2 mm/sec = 1 cm every 5 sec

Emptyng time: approx. 10 min (1 m pipe lenght)

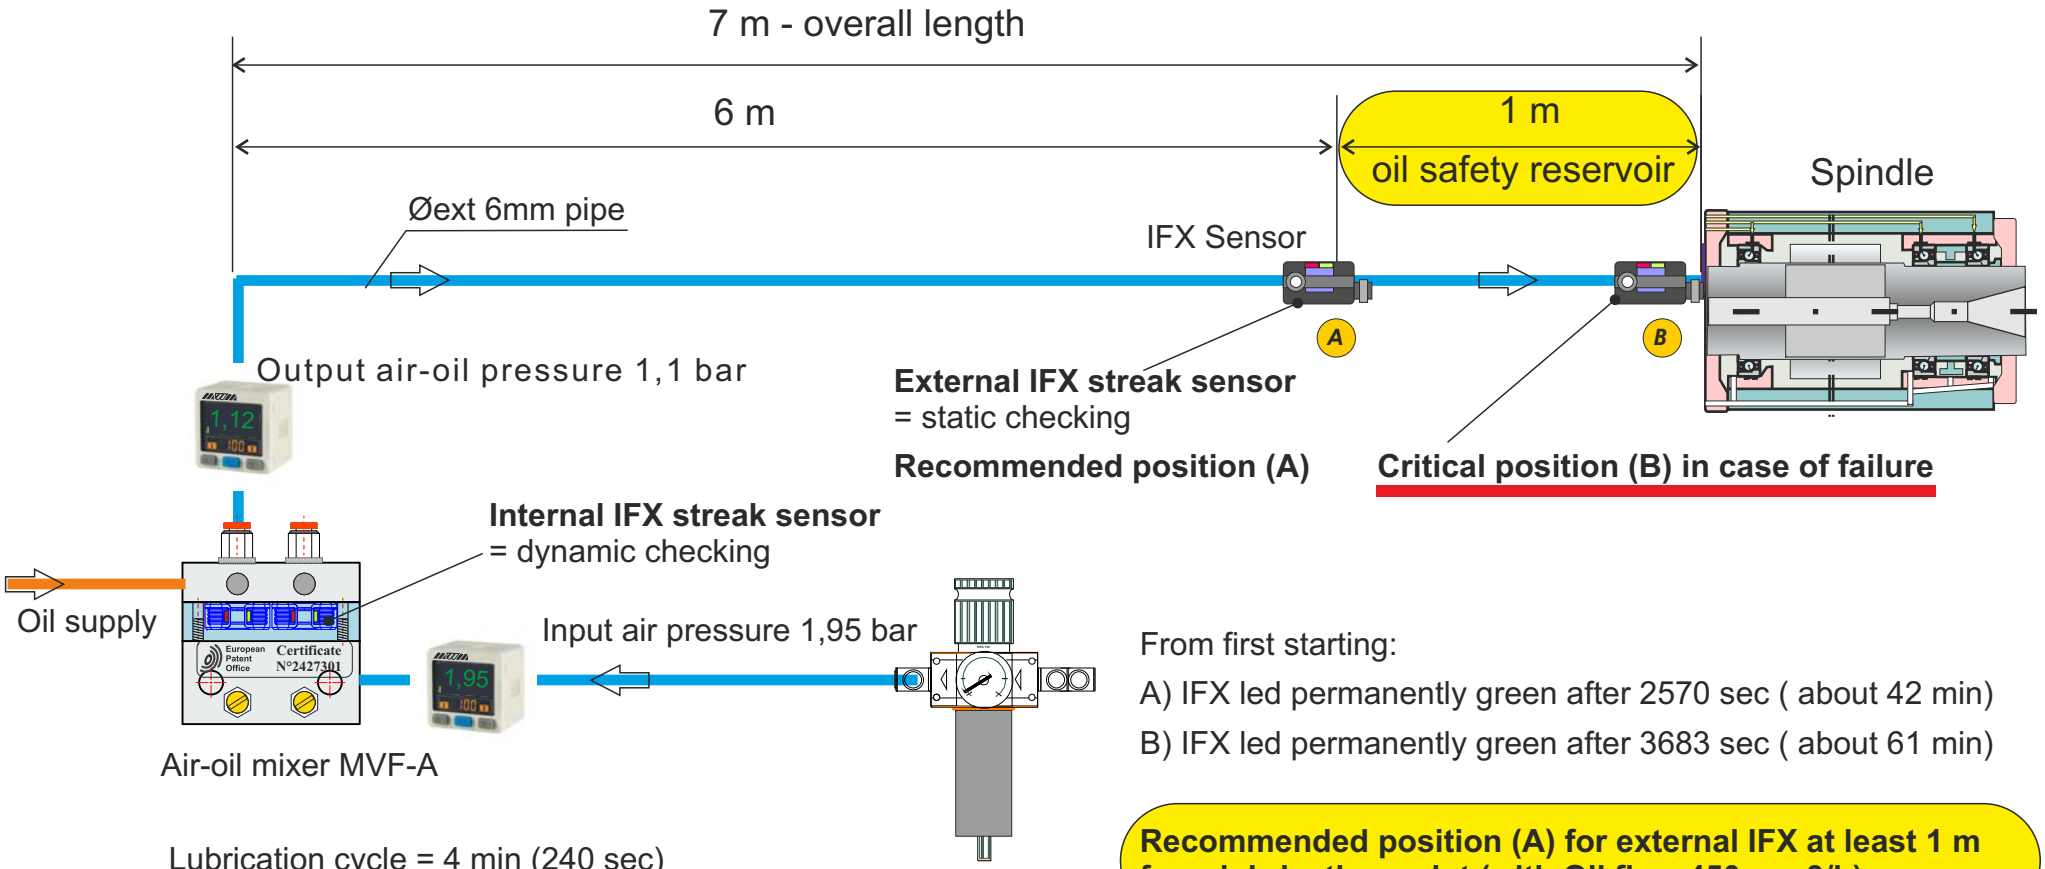

Lubrication cycle = 4 min (240 sec)

Lubrication cycles in 1 hour = 15

Dosing element = 30 mm^3/cycle

Oil flow = 450 mm^3/h

From first starting:

A) IFX led permanently green after 2570 sec (about 42 min)

B) IFX led permanently green after 3683 sec (about 61 min)

Recommended position (A) for external IFX at least 1 m from lubrication point (with Oil flow 450 mm3/h)

MWM Schmieranlagen Srl
Via G.Galilei 4B I-20068 Peschiera Borromeo (Mi)
Tel:+39 02 54 75 311 Fax +39 02 551 948 78
website://www.mql.it e-mail: info@mql.it